

Filtration | Separation | Purification

Single Cartridge Filter Housing

Sanitary single cartridge filter housings are designed to hold (1) filter cartridge, Filter lengths from 5" up to 40" are available. These housings are compatible with all branded filter cartridge styles such as 226 (code 7), 222 and DOE with adapter.







Application for beer and wine, beverage, also biotech and pharmaceutical
The housings are made of high purity ANSI316L stainless steel. Surface finished to $Ra < 0.2\mu m$. We have both T style type and Inline style type housings. Inlet and Outlet butterfly valve, Top diaphragm pressure gauge are available as options.



Standard Features

- T-style or Inline flow pattern
- 87Psi pressure rated for liquid applications
- ANSI 316L stainless steel
- Tri-clamp body closure
- 1.5" Tri-clamp pressure gauge port
- 1" Tri-clamp Inlet and Outlet
- Filter length from 5" up to 40"
- For 226 code 7, twist and lock style filter cartridges.
- For 222, DOE filter cartridge with adapter
- Surface finish $Ra < 0.2\mu m$
- Welded or 1/2" Triclamp hosebarb vent and drain
- Sight Glass and Tee options are also available if needed.

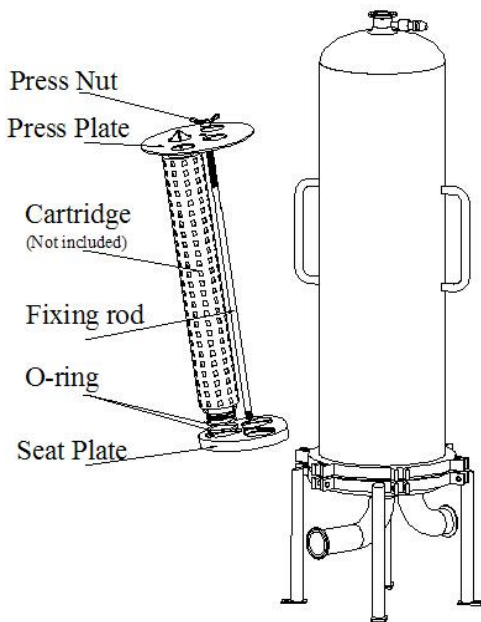
Ordering information

Ordering information							
SCF	6	T	226	10		1.0TC	S1
FILTER TYPE		Housing type	Filter holder	Filter length		Inlet/outlet	Vent&drain
Single cartridge housing		T=T style	226	5=5"	30=30"	TC=Tri clamp	S1= Welded
Material Type		I= Inline	222	10=10"	40=40"	3/4TC 3/4"TC	S2=1/2"TC
4=304SS		DOE	20=20"	1.0TC=10"TC	1.5TC=1.5"TC	2.0TC=2.0"TC	
6=316SS							
							
							
T style housing		Inline style Housing		226 filter		222 filter	
				DOE filter		Welded vent&drain	
						TC vent&drain	

Multi Round Filter Housing (3-12 Round)

Sanitary multi cartridge filter housings are designed to hold multi filter cartridges, For higher flow applications. We offer housings for 3 , 5 , 7, 9, 12 filters options We also offer customized housings for more than 12 rounds application. Standard Inlet/ Outlet connections for these housings are the housings are T style (bottom in and bottom out), Side inlet bottom outlet type as option

These housings are well suited for beer and wine, beverage, biotech and pharmaceutical applications. The housings are made of high purity ANSI316L SS. Surface finished to $Ra < 0.2\mu m$. The filter cartridge seat is a fully removable design for complete sanitation Purposes.



Standard Features

- Made of ANSI 316L stainless steel
- 87Psi pressure rated for liquid applications
- For 226 code 7, twist and lock style filter cartridges.
- For 222, DOE filter cartridge with adapter
- 1.5" Tri-clamp pressure gauge port
- 1.5" or 2" Tri-clamp Inlet and Outlet
- Filter length from 10" up to 40"
- Swing bolts body closure
- Fully removable filter seat
- Surface finish $Ra < 0.2\mu m$
- Welded or 1/2" Triclamp hosebarb vent and drain
- Sight Glass and Tee options are also available if needed.



Ordering information (3-12R) T style

MCF	6	3	20"	226	1.0TC	S1
Filter type		Filter qty	Filter length	Filter holder	Inlet/outlet	Vent&drain
Multi cartridge filter		3=3filters	10=10"	226	TC=tri clamp	S1=welded
		5=5filters	20=20"	222	1.0T=10"TC	S2=1/2"TC
		7=7filters	30=30"	DOE	1.5TC=1.5"TC	
Material type		9=9filters	40=40"		2.0TC=2.0"TC	
4=304ss		12=12filters			2.5TC=2.5TC	
6=316ss					3.0TC=3.0TC	

Customized Features

- Side inlet bottom outlet layout
- Flange or Union type in&outlet
- Top lifting davit with swing bolt
- unremovable filter seat for industrial application
- Higher pressure application

Customized Housings



Please call us if you want customized housings